

Husqvarna HiPERFLOOR™

HUSQVARNA CONSTRUCTION PRODUCTS




Husqvarna GM 3000™ Floor Treatment

Husqvarna GM 3000 is a latex-based bonding additive specifically formulated for use in re-grouting / filling of holes in concrete surfaces. GM 3000 forms an inherent part of the Hiperfloor process. GM 3000 is effective for patching and filling small air pockets / pin holes when polishing concrete floors.

GM 3000™ and Grit 120

This step is designed to fill the holes in the concrete by applying the GM 3000 grouting product. This should be applied with a soft broom. Average amount of product used is 20–25 l/100m². While still wet, run the machine with 120 grit diamonds through the wet GM 3000 (set heads in opposite directions with both disc speed and head speed to 5). The GM 3000 will combine with the dust being created by the 120 grit diamonds and be forced into holes created by air bubbles and pulled-out aggregate. Apply Hiperhard liberally with a very soft broom or sprayer. If spraying, be sure to follow with broom to work the product into the pores of the concrete. Apply Hiperhard liberally so the concrete is saturated but puddles are not formed (approximately 20 l/100m²). Allow Hiperhard™ to totally dry before continuing to the next grinding step. A minimum of 6–12 hours is recommended for maximum curing of product.

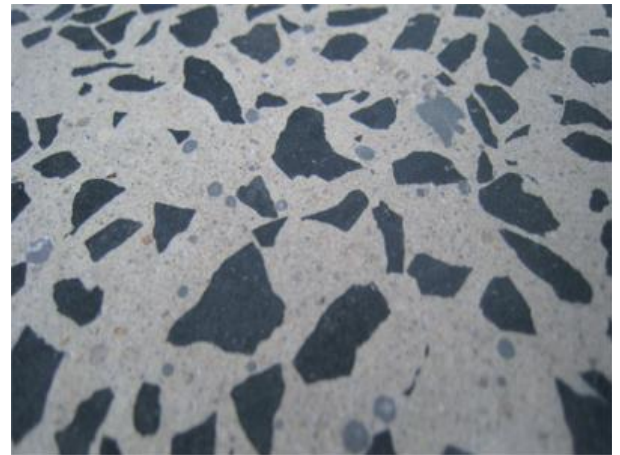

Holes filled when grinding with 120 grit metal-bonded diamonds and GM 3000™.